

PRODUCTS & SERVICES



TPE
T E X A S
P R O C E S S
E Q U I P M E N T

A COMMON SENSE APPROACH TO TECHNOLOGY

PUMPS



EXP air operated diaphragm pumps in sizes thru 3". Cast iron, aluminum, stainless steel, Hastelloy C, polypropylene and PVDF materials of construction. Flows to 275 GPM. Drum pump, flap valve and powder handling versions available. Air operated piston pumps in steel and stainless steel construction for pumping high viscosity materials, capable of discharge pressures to 10,000 psi. Complete line of extrusion packages available. Air system components, including filter/regulator/lubricator combinations.



Cast iron and stainless steel end suction and self-priming centrifugals for industrial water, wastewater and dewatering services. Submersible non-clog, sewage ejector, solids handling, grinder and sump models available. Complete self-priming sewage lift station packages.



Electric submersible pumps with 1" to 6" discharge, heads to 140 ft, 1/6 thru 30 hp. Available in multiple configurations including: corrosion resistant stainless steel pumps, sump/sewage/sludge pumps, trash/non-clog/solids handling pumps, sand pumps, vortex pumps, slurry agitator pumps, grinder/cutter/shredder pumps, dewatering/utility pumps and high temperature models.



Sealless, leakproof canned motor centrifugal pumps. Available in steel, 316SS, Alloy 20 and Hastelloy C. Nominal hp ratings available from 1 to 150. Temperatures from -400°F to 1,000°F. G series feature more than 100 models in 30 sizes with capacities to 2,000 gpm, heads to 450 ft; system pressures to 5,000 psi. NC series feature ANSI design with self-contained diagnostics. Special canned motor drive options available. Dynapump LE series features canned motor pumps at a price comparable to mechanical seal pumps.



Sealless, magnetically driven non-metallic gear pumps with absolutely no wetted metallic parts. Available in six sizes with flows to 33 gpm, pressures to 150 psig, and temperatures to 150°F. For medium to highly corrosive clean liquids used in chemical processing, dosing, and water treatment.

ECO® Corrosion resistant gear pumps constructed of 316SS, Alloy 20 and Hastelloy C. Flows to 55 gpm, pressures to 100 psig. Available in packed, single and double seal configurations. Sealless mag-drive option available. Eastern 316SS, Alloy 20 and Hastelloy C centrifugal pumps in single and multi-stage design. Single and double seals, flows to 85 gpm, heads to 365 ft.



Non-metallic, corrosion resistant, fiberglass reinforced, thermoset vinyl ester/epoxy centrifugal pumps designed for corrosive and other difficult liquids. Available in horizontal ANSI dimensional sealed, mag-drive, close coupled and self priming configurations. Vertical sump pumps in 19 sizes and lengths to 30 feet. Flows to 5,000 gpm, heads to 475 ft.



High pressure, hydraulically actuated diaphragm pumps in cast iron, bronze, 316SS, Hastelloy C and non-metallic construction. Flows to 45 gpm, pressures to 3,000 psig. Excellent for high head pressure, low flow applications. Metering pump available.



Sealless, magnetically driven gear and centrifugal pumps constructed of 316SS, Alloy 20 and Hastelloy C. Gear pump flows to 55 gpm, pressures to 225 psig. Centrifugal pump flows to 85 gpm, heads to 365 ft.



Sealless, magnetic drive centrifugal pumps lined in PFA or ETFE. Flows to 325 gpm, heads to 180 ft. Available in close or long coupled designs. Small/OEM packaged, magnetic drive, close coupled centrifugal pumps in molded polypropylene or ETFE, fractional to 3 hp (some with dry run capabilities).



Modular drum and container pumps in aluminum, 316SS, polypropylene, PVDF and Hastelloy C. Wide selection of electric and pneumatic motors. Sealed and sealless designs available. Tube lengths to 16 feet.




Sealless, magnetically driven gear and centrifugal pumps. Flow rates from 0.25 cc/min to 10 gpm. Differential pressures to 200 psig, static pressure from high vacuum to 5000 psig. Temperatures from -60°F to 400°F. Special modifications available. Excellent for high head pressure, low flow applications including pipeline, densitometer and closed loop sampling, OEM, laboratory, and pilot plants.



Progressive cavity pumps in cast iron & 316SS. Buna, EPDM & fluoroelastomer stators. Flow rates to 50 gpm, pressures to 600 psig. Variable speed metering capabilities.

TPE offers custom turnkey pump systems built in-house to meet your specifications; from the simple to the complex. All systems are fully tested prior to shipment. CAD drawings and full documentation services available. Typical applications include:

- Chemical injection systems – pH control, corrosion/scale/biological inhibitors, disinfection/deodorization and defoamers
- Closed loop sampling systems
- Cooling tower/boiler equipment packages
- Sample process recovery systems
- Fertigation packages
- Polymer make-up & feed skids
- Custom water treatment panels

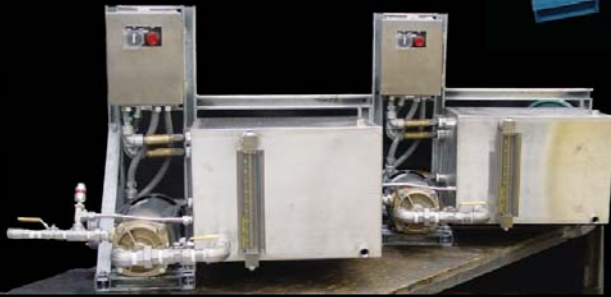

In-house services also include; base plate mounting, controls and drives for all pumps. Additionally, TPE provides factory authorized repair service and testing for all of its distributed products from service centers located in Houston and Dallas.



HOUSTON

5215 Ted Street • Houston, Texas 77040
Tel: 713.460.5555 • Fax: 713.460.4807
Toll-free: 800.828.4114

DALLAS

10715 Harry Hines Blvd. • Dallas, Texas 75220
Tel: 214.902.8077 • Fax: 214.902.8076
Toll-free: 800.346.5501



SEND US YOUR APPLICATION
VIA OUR ONLINE DATASHEET

WWW.TEXASPROCESS.COM

SALES@TEXPROC.COM