

WebMaster® ONE integrates Walchem's advanced sensing, instrumentation, fluid handling, and communications technologies to bring you the most sophisticated on-line process controller in the water treatment industry.



ONE simple and flexible controller for ALL your Water Treatment needs.

WebMasterONE is the most powerful, affordable, online analytical process controller the water treatment world has ever seen! The simple, intuitive programming makes it easy to configure your WebMasterONE to control multiple cooling towers, boilers, closed loops, waste streams or virtually any water treatment process. It will monitor and control based on Conductivity, pH and ORP sensor inputs as well as measurement inputs from other devices such as corrosion, chlorine dioxide, level, temperature, and pressure.

WebMasterONE is on-duty 24 hours a day, 365 days a year, keeping on-site and off-site personnel notified of system performance, all the while providing comprehensive and reliable water treatment control.

Summary of Features and Benefits



- Easy to start-up and use - with just a web browser!
- Immediately notify on-site and off-site personnel of any problems via email, cell phone text message or pager
- Ultra-secure, patented Internet Connectivity On Demand (ShoulderTap)
- 24/7 management of multiple assets
- Ethernet and USB are standard for simple connectivity
- Modbus is available for seamless integration with building energy management, distributed control, process management and SCADA systems
- Email reports and data on a regular basis
- Protect the building's infrastructure while conserving water, energy or chemicals
- Remote access, anytime, from anywhere



Web Master® ONE

Innovation

WebMasterONE is the most advanced online process controller in the water treatment industry. It supports all global communications standards:

- USB plug-n-play for local laptop communications (standard feature)
- Ethernet for LAN communications (standard feature)
- Internal analog modem (optional)
- Internal cellular modem utilizing the latest global standard digital technologies (CDMA, GPRS, GSM) used by most major cellular carriers (optional)

Simplicity

True innovation has also made WebMasterONE the easiest controller to use! To communicate with WebMaster ONE, simply connect the USB cable to your laptop, open a standard web browser, and type in the WebMaster default address. That's it! You're connected to the WebMasterONE and surfing the pages just like a website.

Convenience

Walchem's patented ShoulderTap® technology (Internet Connectivity On Demand) allows WebMasterONE to be monitored and controlled over the Internet from any computer, anywhere in the world, with a standard web browser, without the need to be on the Internet at all times. No proprietary software, no long distance phone charges, and it's completely safe since the controller is only connected to the Internet when you request it, or when it sends out reports and alarms.

Compatibility

WebMasterONE supports many of the most popular global communications standards:

- MODBUS TCP/IP(Ethernet) - Seamless connectivity to building energy management, distributed control, process management and SCADA systems
- SMTP- EMAIL for sending alarms, reports, or data log files
- ETHERNET
- Cell phone text messaging for instant, descriptive text message alarms
- Networking: Ethernet based networking allows the use of a single phone line or cell modem for communicating with multiple controllers at one site, even when they are located in different buildings!

Reliability

Every part of WebMasterONE has been designed for reliable performance in any application:

- Industrial grade pH/ORP/Conductivity sensors
- Rugged flow switch manifold
- UL, CSA and CE safety and electromagnetic performance approvals reduce electrical safety liability concerns and dramatically reduce electrical noise and powerline related field problems

Flexibility

WebmasterONE allows you to control cooling towers, boilers, closed loops, condensate lines, wastewater systems or any combination using one controller. All standard water treatment control methods are included in every WebMasterONE: Biocide timers, On/Off and Time Proportional Control, Inhibitor feed, Intermittent boiler sampling with flashing detection, ORP control with periodic spike, and many others.

INPUTS

Power

100-120/220-240 VAC +/-10%

12 amp, 50/60 Hz

Sensors (1 standard, up to 4 optional)

Signal: +/- 1.4 VDC (isolated)

Temperature: 1Kohm, 10 Kohm or 100 Kohm

Digital Inputs (3 standard, additional 6 optional)

Isolated dry contact

0-300 Hz, 1.5 msec minimum width

Analog (4-20 mA) Inputs (8 optional)

2 or 3 wire, internally powered by 24 VDC loop power available, 25 ohm input resistance, 1000 ohm maximum load

OUTPUTS

Mechanical relays (8 standard)

115VAC, 10 amp resistive, 1/8 HP

230VAC, 6 amp resistive, 1/8 HP

May be dry contact or powered by line voltage

R1-R4 fused together, current not to exceed 5.5 amp

R5-R8 fused together, current not to exceed 5.5 amp

Only powered relays are fused


N.O. and N.C. contacts provided

Analog (4-20 mA) Outputs (up to 4 optional)

Isolated, 500 ohm maximum load, internally powered by 24 VDC

MECHANICAL

Enclosure	Fiberglass
NEMA Rating	NEMA 4X
Display	64 x 128 pixel backlit LCD
Operating Ambient Temperature	0 to 49°C (32 to 120°F)
Storage Temperature	-29 to 80°C (-20 to 176°F)
Shipping Weight	Approx. 5.4kg (12 lb)

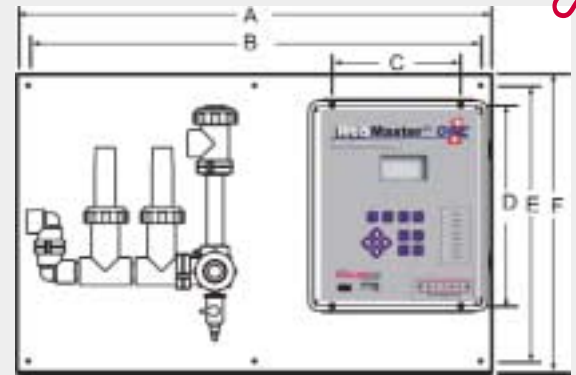

MEASUREMENT PERFORMANCE

	Range	Resolution	Calibration
Contacting Conductivity	10 to 10,000 µS/cm	1 µS/cm	± 50% of raw reading (scalable to ppm)
pH	-2 to 16 pH	0.01 pH	Single or Dual Point
ORP	-1400 to 1400 mV	1 mV	Single or Dual Point
Temperature	0 to 200°C (32 to 392°F)	1°C (1°F)	Single Point
Electrodeless conductivity	50 to 1,000 µS/cm	1 µS/cm	Single or Dual Point (scalable to ppm or %)
	1000 to 10,000 µS/cm	1 µS/cm	
	10 to 100 mS/cm	1 mS/cm	
	100 to 1000 mS/cm	1 mS/cm	

	Large Panel (3 Sensors)	Small Panel (1 or 2 Sensors)
A	30.0" (762 mm)	24.0" (610 mm)
B	28.5" (724 mm)	22.5" (572 mm)
C	8.0" (233 mm)	
D	12.75" (324 mm)	
E	17.5" (445 mm)	
F	19.0" (483 mm)	

SENSORS


Sensor	Range	Temperature	Pressure	Process Connection	Materials of Construction
Electrodeless Conductivity	4 ranges (see above)	32 to 158°F	0 to 140 psi	1" NPTM submersion, 2" NPTM in-line adapter	CPVC, FKM in-line o-ring
pH	-2 to 16 pH	50 to 158°F	0 to 100 psi	1" NPTM submersion, 3/4" NPTF in-line tee	CPVC, Glass, FKM o-rings, HDPE, Titanium rod, Glass filled PP tee
ORP	-1400 to 1400 mV	32 to 158°F	0 to 100 psi	1" NPTM submersion, 3/4" NPTF in-line tee	CPVC, Glass, FKM o-rings, HDPE, Titanium rod, Glass filled PP tee
Contacting Conductivity (High pressure)	10 to 10,000 µS/cm	32 to 392°F	0 to 250 psi	3/4" NPTM	316SS, PEEK
Contacting Conductivity (Graphite)	10 to 10,000 µS/cm	32 to 158°F	0 to 140 psi	3/4" NPTF tee	Graphite, Glass-filled PP, FKM o-ring
Contacting Conductivity (SS)	10 to 10,000 µS/cm	32 to 158°F	0 to 140 psi	3/4" NPTF tee	316 SS, Glass-filled PP, FKM o-ring
pH (High pressure)	0 to 14 pH	32 to 275°F	0 to 300 psi	1/2" NPTM gland	Glass, Polymer, PTFE, 316 SS, FKM
ORP (High pressure)	-1400 to 1400	32 to 275°F	0 to 300 psi	1/2" NPTM gland	Platinum, Polymer, PTFE, 316 SS, FKM
Flow Switch Manifold Assy	Open < 0.7 gpm	32 to 140°F	140 psi up to 100°F, 50 psi @ 140°F	3/4" NPTF	Glass-filled PP, PVC, FKM, Isoplast
Flow Switch Manifold Assy (High pressure)	Open < 0.75 gpm	32 to 158°F	0 to 300 psi	3/4" NPTF	Carbon steel, Brass, 316 SS, FKM

POWERED BY **SHOULDER Tap**


1. User Logs onto
www.walchem.com and
enters **ShoulderTap**® ID,
password and controller
phone number.




2. Walchem Server
"ShoulderTaps"
WebMasterONE®

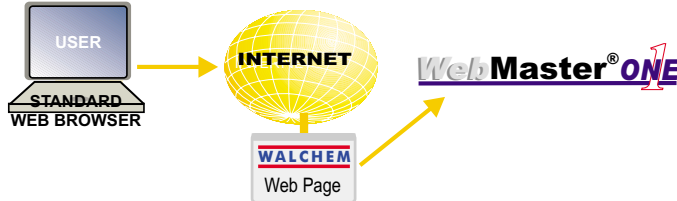

3. **WebMasterONE**® dials out
to local Internet Service
Provider and logs onto
Internet.

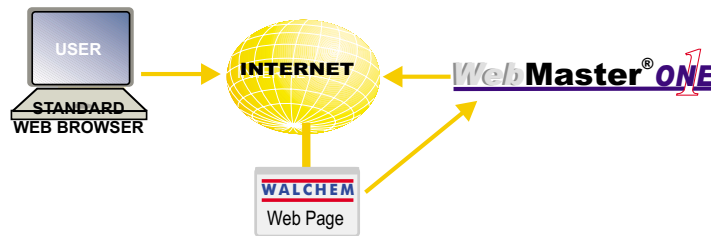

4. User is seamlessly
connected to the
WebMasterONE® where
2nd ID and password
are entered for added
security.

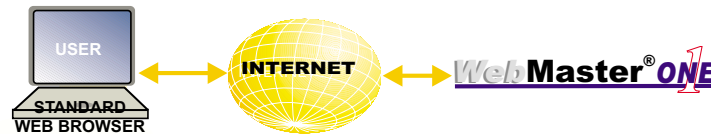


Walchem has made use of the Internet as a remote access communications platform for industrial control equipment a practical reality. While others just attempt to reduce the cost of embedded web server hardware, Walchem has solved the problem of the high cost and lack of availability of a permanent connection to the Internet.

WebMasterONE makes programming your cooling tower or boiler simple and fast and WebMasterONE does not require any proprietary software to reside on your computer. Set-up and programming are all done via a standard web browser.

Easy to follow menus and system set-up screens make programming user friendly and intuitive. Once WebMasterONE is installed, the Start-up menu jump-starts you through the top level set-up. The Input, Output and utility menus guide you through the rest of the programming.

Ethernet Networking

Walchem's Ethernet Networking allows you to leverage the power of the WebMasterONE® communications abilities. By using the Local Area Network (LAN) or by connecting the products together via Ethernet - you can access all the controllers on the network from a single phone line. It's simple. Each controller includes Ethernet and the Master controller requires the Ethernet Networking "Master" capability. Utilizing a Master-Slave type relationship - one controller is configured to be the Master or window to all the other units (Slaves) on the network.

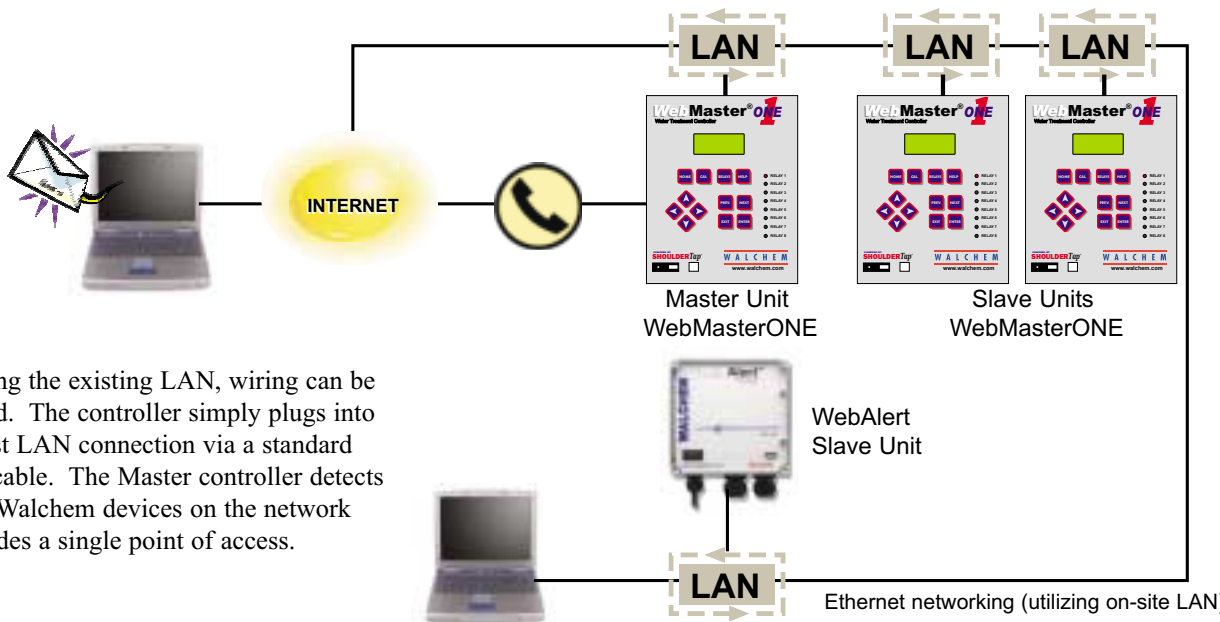

By utilizing the existing LAN, wiring can be minimized. The controller simply plugs into the nearest LAN connection via a standard Ethernet cable. The Master controller detects the other Walchem devices on the network and provides a single point of access.

Communications



With an embedded web server, WebMasterONE® utilizes standard TCP/IP Internet communications. Remote communications can be established with WebMasterONE® via the Internet or on a direct line with modem-to-modem capability. USB and Ethernet allow easy on-site access for plant personnel and system operators. Multiple users can access the controller simultaneously. A graduated password protection system allows users varied degrees of access from view only to full system configurations. In addition, WebMasterONE® delivers a range of user-friendly information reporting tools including email notifications for datalogs, alarms and system summaries.

USB Plug and Play

For local monitoring and reconfiguration of your WebMasterONE® via LapTop or dedicated on-site PC.

ShoulderTap® Internet Communications



For monitoring and reconfiguration of your WebMasterONE® remotely via the Internet (requires modem card option).

DirectTap Modem-to-Modem

For remote monitoring and reconfiguration of your WebMasterONE® using traditional modem-to-modem communications (requires modem card option).

Ethernet

For monitoring and reconfiguration of your WebMasterONE® via Local Area Network or remotely via the Internet.

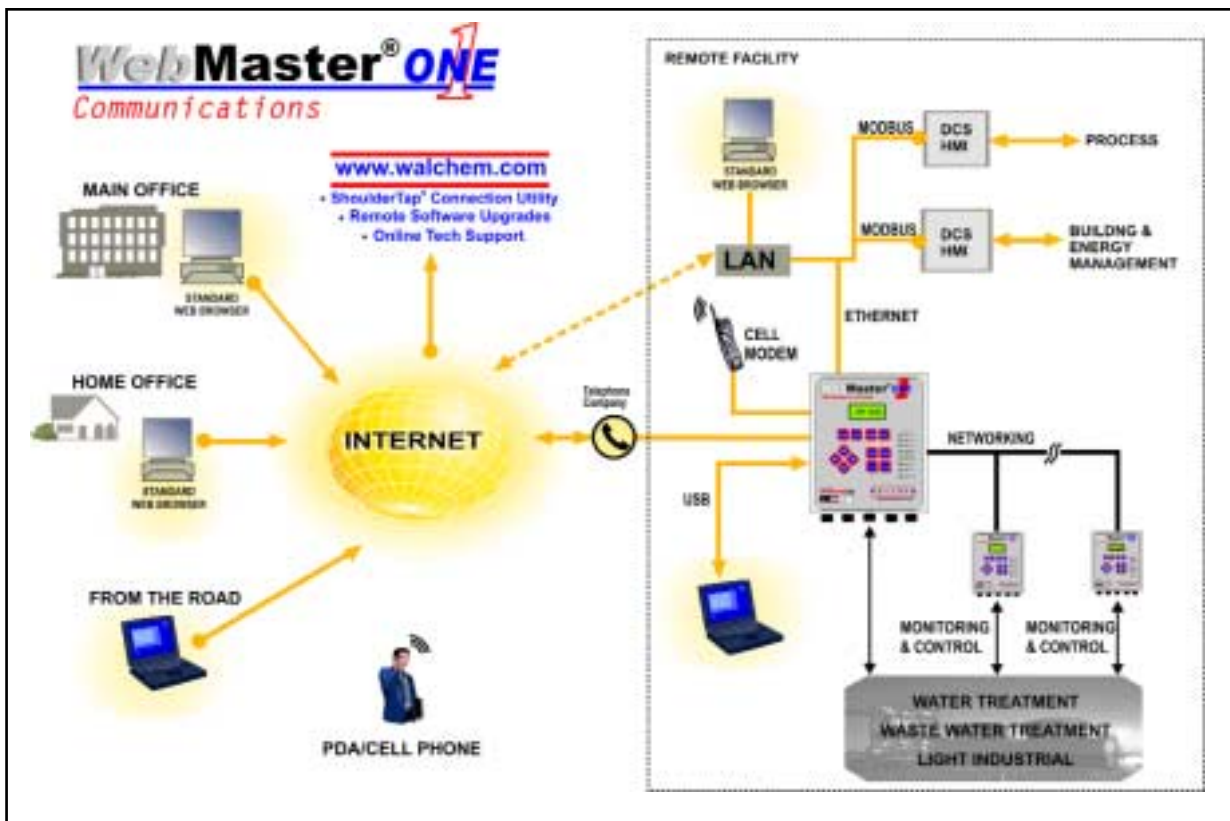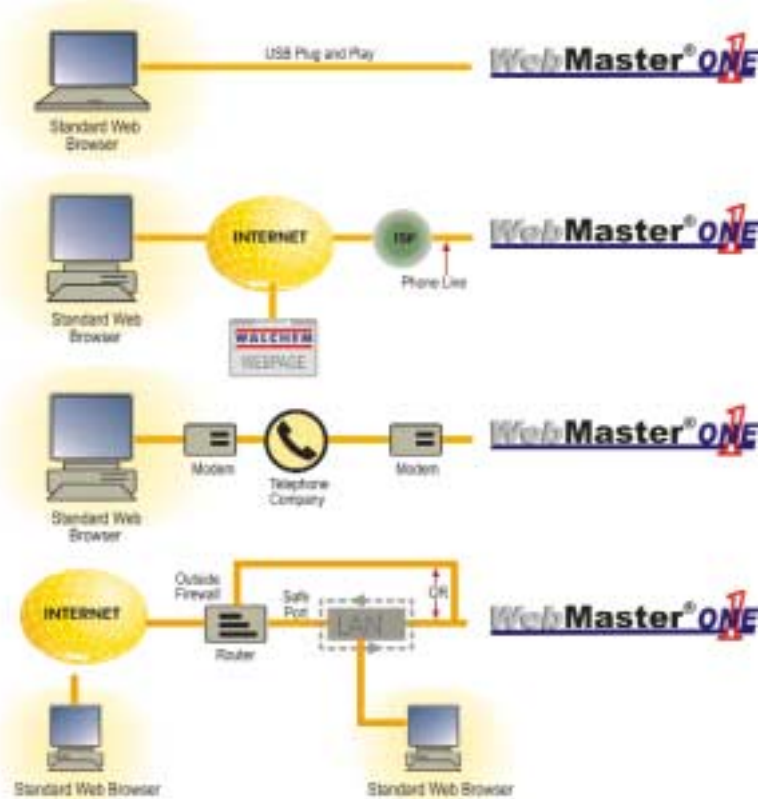

Single Cooling Tower	WMT8
Boiler	WMB8
Dual Cooling Tower	WMD8
Mixed Purpose	WM18

Sensor Selection

A	B	C	
A	B	C	D
A	B	C	D
A			

System Options

-	A	B	C	D	E	F
-	A		C	D	E	F
-	A	B	C	D	E	F
-	A		C	D	E	F

SENSOR SELECTION

Single Cooling Tower WMT8

- A System Cond**
 - 0 = No sensor
 - 1 = Graphite electrode, 150 psi
 - 2 = Electrodeless, 150 psi
 - 3 = SS electrode, 150 psi
 - 4 = High pressure, 300 psi
- B pH/ORP**
 - 0 = None
 - 1 = pH, flat, 100 psi
 - 2 = ORP, rod, 100 psi
 - 3 = Both, 100 psi
 - 4 = pH, bulb, high pressure, 300 psi
 - 5 = ORP, high pressure, 300 psi
 - 6 = Both, 300 psi
- C Makeup Cond**
 - 0 = None
 - 1 = Graphite
 - 2 = Electrodeless
 - 3 = SS electrode
 - 4 = High pressure

Boiler WMB8

- A Boiler #1 Conductivity Sensor**
 - 0 = None
 - 1 = 250 psi
- B Boiler #2 Conductivity Sensor**
 - 0 = None
 - 1 = 250 psi
- C Boiler #3 Conductivity Sensor**
 - 0 = None
 - 1 = 250 psi
- D Boiler #4 Conductivity Sensor**
 - 0 = None
 - 1 = 250 psi

Mixed Purpose WM18

- A number of sensor inputs required**
 - 1 = One sensor input
 - 2 = Two sensor inputs
 - 3 = Three sensor inputs
 - 4 = Four sensor inputs

Dual Cooling Towers WMD8

- | | |
|---|---|
| A Tower #1 and C Tower #2 Conductivity | B Tower #1 and D Tower #2 2nd Sensor |
| 0 = No electrode | 0 = No sensor |
| 1 = Graphite electrode | 1 = pH, flat |
| 2 = Electrodeless | 2 = ORP, rod |
| 3 = SS electrode | 3 = pH, High pressure |
| 4 = High pressure | 4 = ORP, High pressure |
| | 5 = Contacting cond |
| | 6 = Contacting cond, high pressure |

SYSTEM OPTIONS

A Voltage Codes (all models)

- 0 = Prewired, 0 powered, 8 dry contact relays
- 1 = Prewired, 7 powered, 1 dry contact relays
- 2 = Prewired, 8 powered, 0 dry contact relays
- 3 = Prewired, 4 powered, 4 dry contact relays
- 4 = Hardwired, 0 powered, 8 dry contact relays
- 5 = Hardwired, 8 powered, 0 dry contact relays
- 6 = Hardwired, 7 powered, 1 dry contact relays
- 7 = Hardwired, 4 powered, 4 dry contact relays

B Flow switch options (WMT and WMD only)

- N = No flow switch, in-line sensors
- L = Loose flow switch manifold, 20 ft cable, low pressure
- P = Flow switch manifold on PP panel, 5 ft cable, low pressure
- S = No flow switch, Submersion sensors
- F = Loose flow switch manifold, 20 ft cable, high pressure
- H = Flow switch manifold on PP panel, 5 ft cable, high press.

C Analog Outputs (all models)

- N = No analog outputs
- 1 - 4 = One to Four 4-20 mA output boards

D Input Options

- N = No input options
- A = 8 analog inputs
- D = 6 digital inputs
- B = Both analog and digital input cards

E Communication Hardware (USB and Ethernet standard)

- N = No additional hardware
- M = Modem

F Communication Software

- N = No additional software
- 1 = Ethernet networking master capability
- 2 = Modbus TCP/IP (server mode only)
- 3 = Both Ethernet networking and Modbus TCP/IP

AGENCY APPROVALS

UL	ANSI/UL 61010-1:2004, 2nd Edition*
CAN/CSA	C22,2 No.61010-1:2004 2nd Edition*
CE Safety	EN 61010-1 2nd Edition (2001)*
CE EMC	EN 61326 :1998 Annex A*

Note: For EN61000-4-6,-3 the controller met performance criteria B.
 *Equipment suitable for use in establishments other than domestic, and those directly connected to a low voltage (100-240 VAC) power supply network which supplies buildings used for domestic purposes.