


SAFE-TANK® Double Wall Tank System

A complete double wall system for secondary containment.

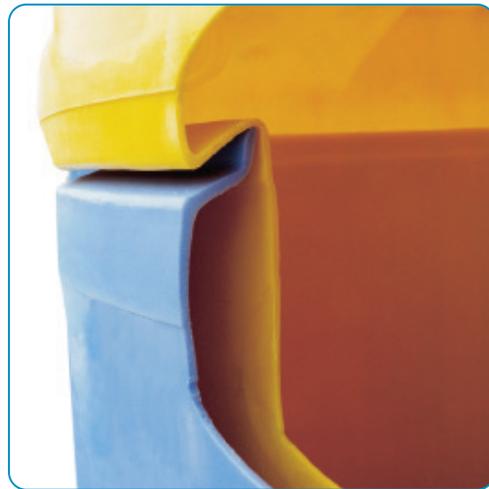

Poly Processing's SAFE-Tank® double wall tank system, is a "tank-within-a-tank" that provides secondary containment to avoid the damaging of equipment or property, loss of chemical, or injury to employees in the event of a spill. The tank is designed to keep contaminants from entering the interstitial area.

The SAFE-Tank® Double Wall Tank System:

- Provides 110% double wall secondary containment.
- Will equalize in the event of a primary tank issue and allow the tank system to be continually used until the operator has time to address the issue.
- Is ideal for chemicals like sulfuric acid that can have dangerous exothermic reactions to water.
- Eliminates the expense, cost and maintenance of secondary concrete containment.
- Minimizes the system's footprint by providing secondary containment in a more compact way.
- Adding an enhanced bellows transition fitting will maximize your SAFE-Tank® double wall tank system's performance.

SAFE-Tank® double wall tank systems are also available with the OR-1000™ system for superior antioxidant resistance.

CALIFORNIA
8055 S. Ash St.
French Camp, CA 95231

LOUISIANA
P.O. Box 4150
2201 Old Sterlington Rd.
Monroe, LA 71203
Tel: 800.523.9871
sales@polyprocessing.com

VIRGINIA
161 McGhee Rd.
Winchester, VA 22603

SAFE-TANK® SYSTEM

SAFE-Tank® Double Wall Tank Systems – STORAGE & CONTAINMENT

	Stock Number	Nominal Capacity	Approx. O.D.	Approx. Overall Height	Lid Size	Ladder Height
	2008700					
	2110150					
L •	Assembly	8,700	11'-11"	14'-10 1/2"	24"	15'
	2006650					
	2107450					
L •	Assembly	6,650	10'-2"	14'-9 1/2"	24"	14'
	2005400					
	2106300					
L •	Assembly	5,400	11'-11"	10'-1 1/2"	24"	10'
	2004400					
	2104950					
L •	Assembly	4,400	10'-3"	10'-4 1/4"	24"	10'
	2004350					
	2104950					
L •	Assembly	4,350	10'-3"	10'-4 1/4"	24"	10'
	2003150					
	2103550					
L •	Assembly	3,150	10'-2"	8'-1 1/2"	24"	7'
	2002500					
	2103100					
L •	Assembly	2,500	8'-0"	10'-5 3/4"	17"	10'
	2001550					
	2101950					
•	Assembly	1,550	8'-0"	7'-5 3/4"	17"	7'
	2001015					
	2101200					
•	Assembly	1,015	6'-5"	7'-1/2"	17"	6'
	2001000					
	2101200					
•	Assembly	1,000	6'-5"	7'-1/2"	17"	6'
	2000750					
	2100940					
•	Assembly	750	5'-0"	8'-2 1/2"	17"	7'
	2000540					
	2100655					
•	Assembly	540	6'-5"	4'-5 3/4"	17"	
	2000405					
	2100445					
	Assembly	405	4'-0"	6'-1/2"	7"	
	2000250					
	2100295					
	Assembly	250	3'-11"	4'- 5 1/4"	7"	
	2000160					
	2100220					
	Assembly	160	3'-0"	5'-3"	7"	
	2000105					
	2100150					
	Assembly	105	3'-0"	3'-10 3/4"	7"	
	2000055					
	2100085					
	Assembly	55	3'-0"	2'-8"	7"	

• = Molded-in lifting lugs

L = Molded-in ladder attachment lugs